


## LI-UN-01 Union (Lintas)

### Features

- Superior Quality Investment-casted Stainless Steel.
- Available in S.S 304(CF8) & S.S 316(CF8M) Grades.
- Precise machining
- Available in BSP / BSPT / NPT Threading as per requirement.
- Pressure Rating PN25, Test Pressure(Hyd.): -30Kg./cm<sup>2</sup> (427 psig)
- Working Pressure 25 Kg./cm<sup>2</sup> (356 psig)

### Suitability

Water, Air, Gas, Oil, Steam

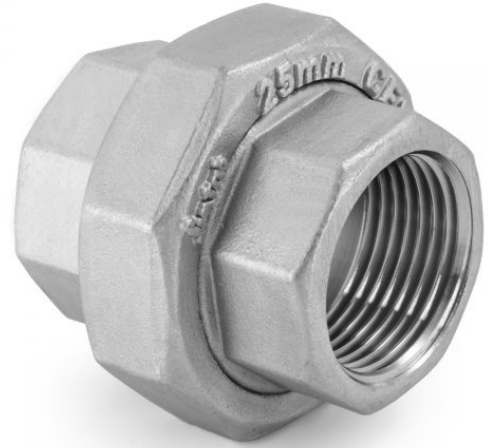

### Dimensions

Size	L (mm)	L (Inch)	A (mm)	A (Inch)	B (mm)	B (Inch)
1/8"	-	-	-	-	-	-
1/4"	39.80	1.57	18.30	0.72	29.00	1.14
3/8"	42.50	1.67	23.00	0.91	36.50	1.44
1/2"	43.50	1.71	27.30	1.07	41.00	1.61
3/4"	51.00	2.00	32.30	1.27	49.40	1.94
1"	55.00	2.17	40.70	1.60	58.20	2.29
1.1/4"	57.00	2.24	49.50	1.95	68.00	2.68
1.1/2"	61.00	2.40	56.20	2.21	76.80	3.03
2"	67.00	2.64	68.80	2.71	91.80	3.61
2.1/2"	84.5	3.33	86	3.39	114	4.49
3"	95	3.74	100	3.94	131	5.16
4"	97	3.82	128	5.04	156	6.14

