

LI-BV-01-3FE Stainless Steel 3 Pcs Ball Valve Flanged-End CLASS 150 (Lintas)

Features

- Superior Quality Stainless Steel Investment Casting.
- Design Standard BS EN ISO 17292 (BS 5351).
- Flanged Ends to ASME B B16.5 Class-150.
- Three Piece Design.
- Superb in Quality and Performance.
- Available in SS304(CF8) & SS316(CF8M)

Test Pressure (Hydrostatic) :

Shell : 31kg/cm²g (440 psig)


Maximum Working Pressure: 10.55 kg/cm²g (150 psig)

Seat (Pneumatic) : 7 kg/cm²g (100 psig)

Maximum Working Temperature: 200°C

Suitability

Water, Air, Gas, Oil, Steam

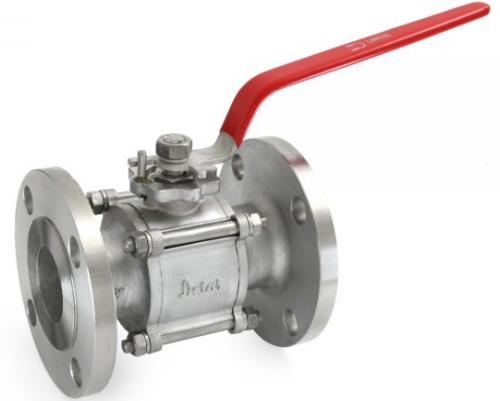

Materials of Construction

Part Name	Specifications / Material	Qty
Body	CF8 / CF8M	1
Connector	CF8 / CF8M	2
Ball	CF8 / CF8M	1
Seat Ring	PTFE	2
Stem	CF8 / CF8M	1
Ring Washer	PTFE	2
Gland Packing	PTFE	1
Thrust Bearing	PTFE	1
Stud / Nut	CF8	4 Set
Spring Washer	CF8 / CF8M	8
Lock Pin	CF8 / CF8M	1
Gland Nut	SS:202	1
Stem Nut	CF8 / CF8M	1
Lever	SS:202	1
Stem Washer	CF8 / CF8M	1

Dimensions

Size (DN)	A	D	N	ØM	PCD	L (±2 mm)	T (±1 mm)
15	14	89	4	16	60.5	108	9.0
20	19	100	4	16	70.0	117	9.5
25	25	108	4	16	79.4	127	10.0
32	32	117	4	16	88.9	140	11.0
40	40	127	4	16	98.4	165	13.0
50	50	152	4	19	120.7	178	15.0
65	63.5	178	4	19	139.7	190	16.0
80	76	190	4	19	152.0	203	17.0
100	100	229	4	19	191.0	229	18.0

